

S E P T I C S Y S T E M S



T O U G H O V E R T I M E


SEPTIC SYSTEMS

| | | | |
|---|------|----------------------------|------|
| 1.0 FEATURES OF SEPTIC SYSTEMS | PG 2 | 4.0 INSTALLATION GUIDE | PG 6 |
| 2.0 HOW TYPAR GEOTEXTILES WORK | PG 3 | 5.0 OVERLAP AND JOINING | PG 6 |
| 3.0 DESIGN CONSIDERATIONS AND SELECTION OF GEOTEXTILES | PG 3 | 6.0 SETTING SPECIFICATIONS | PG 6 |



TOUGH OVER TIME



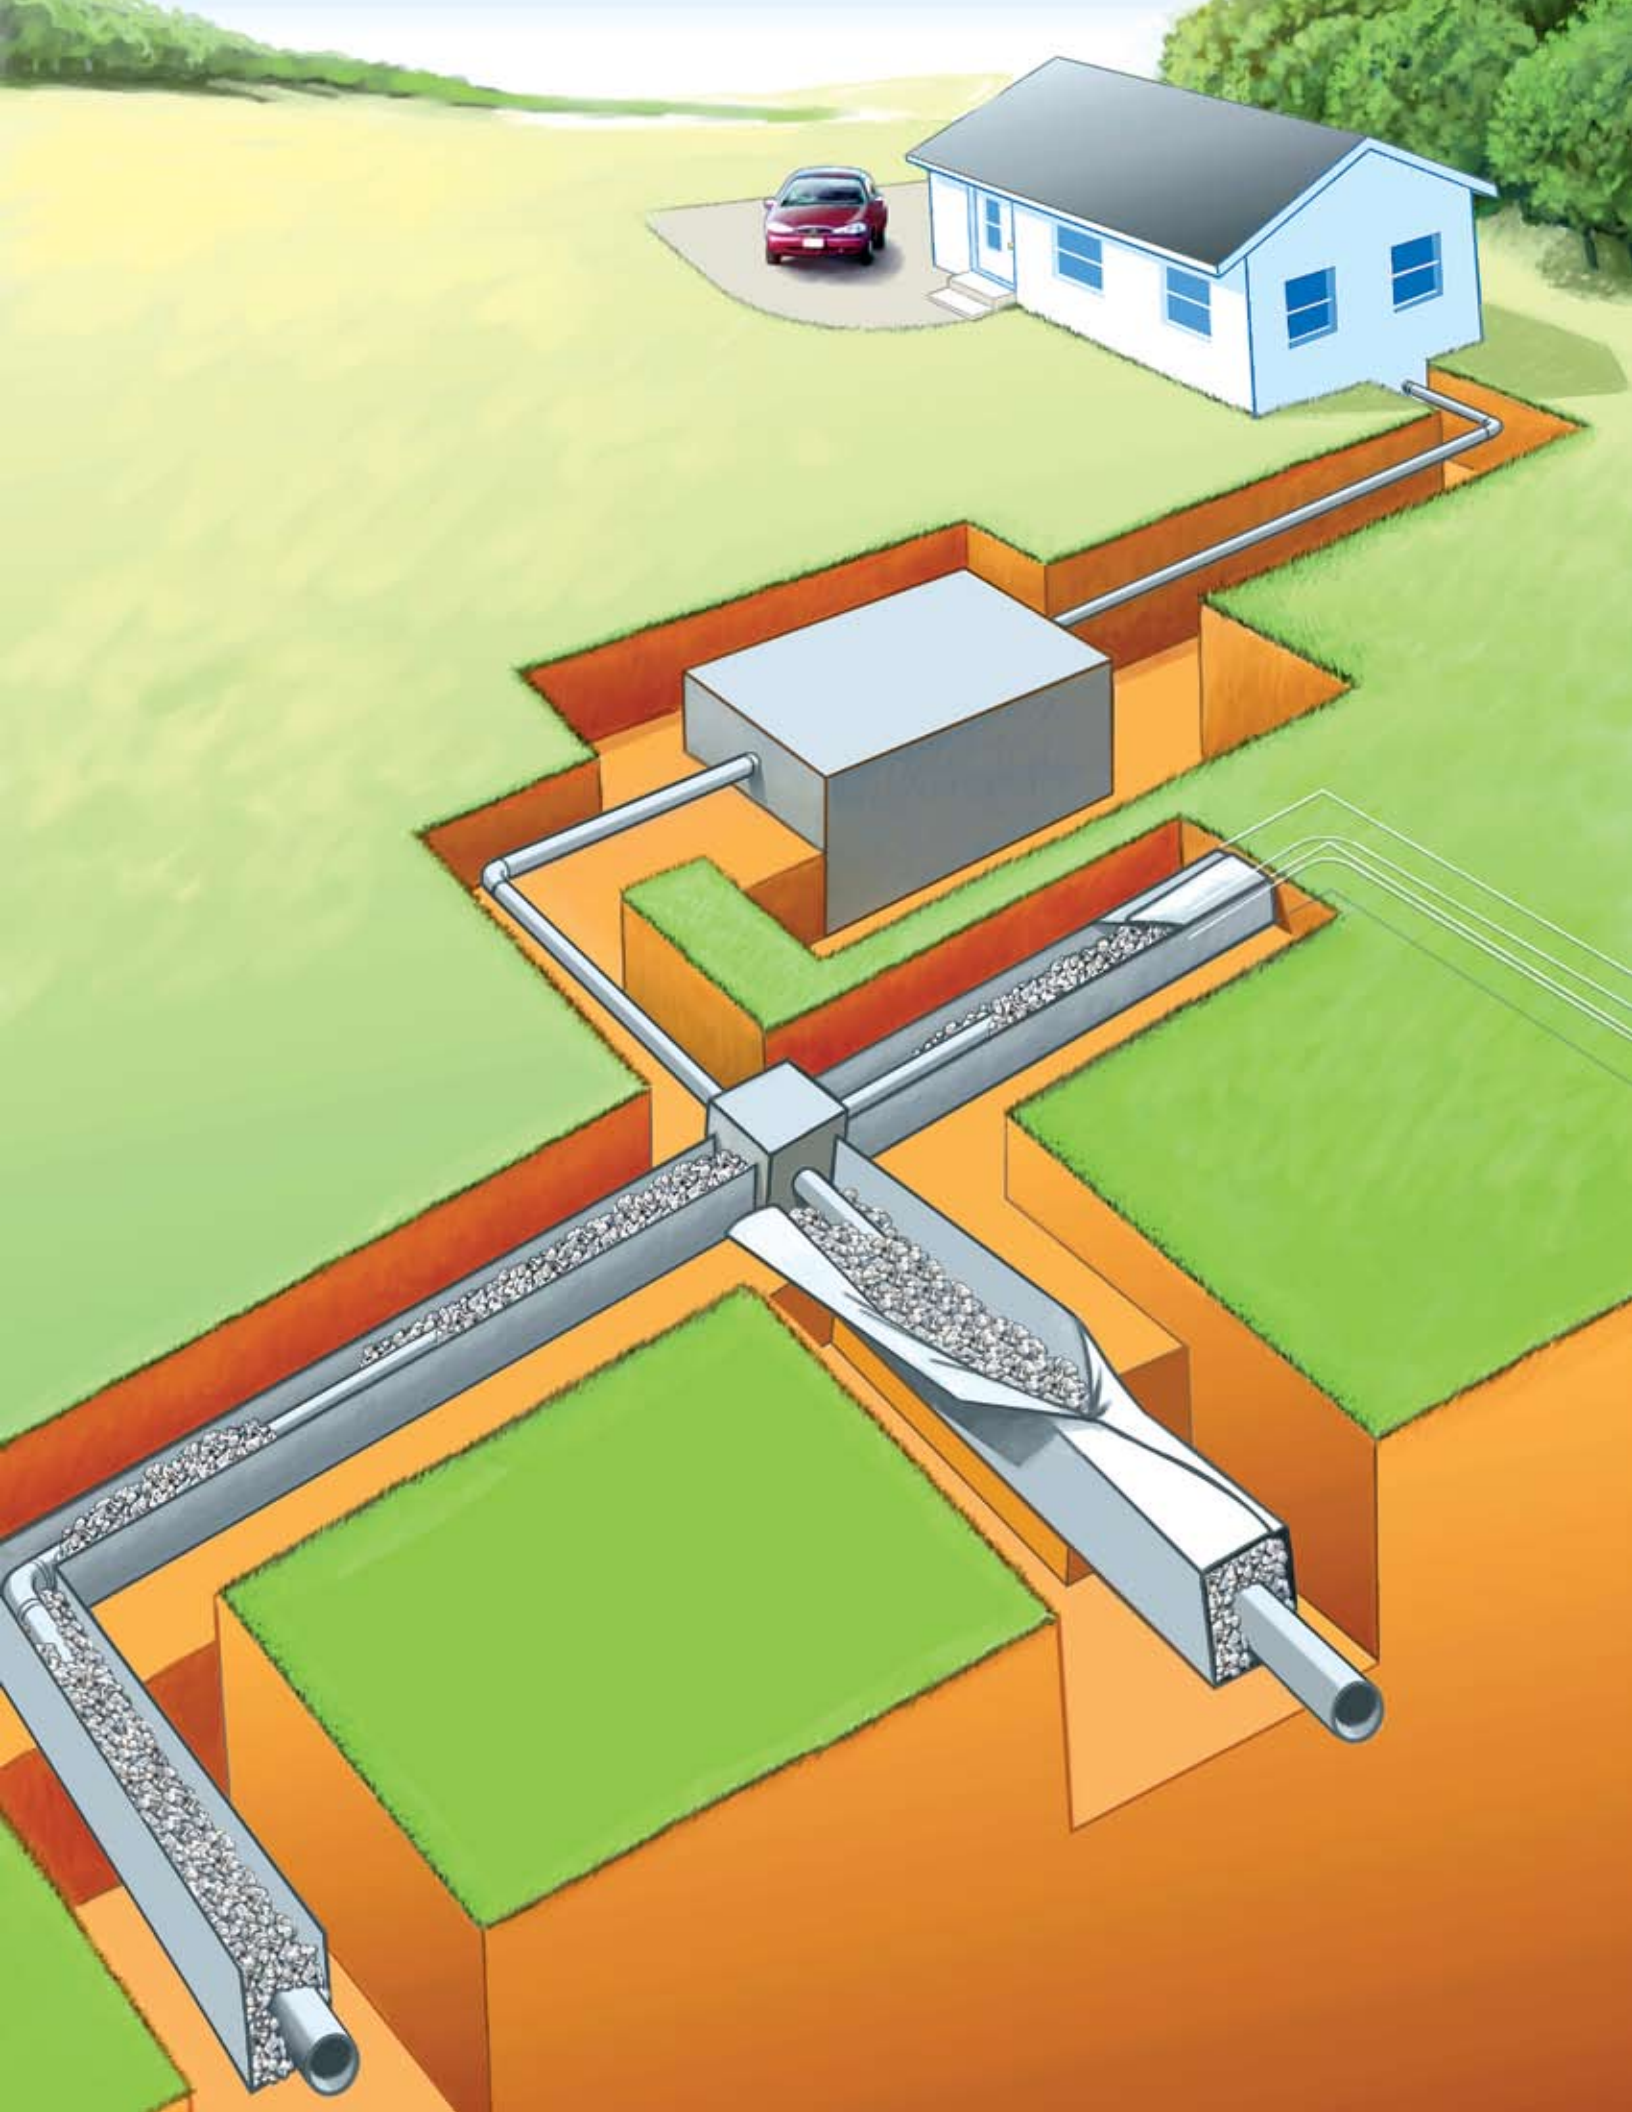

1.0 FEATURES OF SEPTIC SYSTEMS

On-site waste water disposal or septic systems serve approximately one-third of the households in the United States. Septic systems are designed to treat and dispose of domestic sewage. A typical septic system consists of a tank that receives waste from a residence or business and a drain field for disposal of large volumes of liquids with minimum solids. Septic systems are designed for a variety of criteria, including to:

- Collect and settle out solids
- Retain solids for decomposition and removal
- Eliminate liquids by percolation into the ground

Septic systems have been installed in rural locations for centuries. With the increase in people wanting to live outside cities, more and more households are out of reach of municipal sewage and treatment plants. With this increase in installations, failures of septic systems have reached staggering proportions. Failures may be attributed to:

- Insufficient design capacity for solids settling, which causes solids to flow into the drain field and stop water flow (Figure 1)
- Insufficient design capacity for liquids, which causes the system to back up and flood
- No periodic removal of solids
- Intrusion of soil particles from the trench walls, which reduces drain field surface area for absorption of water
- The decomposition of roofing paper, orange paper, straw, or plastic film used prior to back filling, which allows soil to enter the aggregate filter and block flow out of the drain field

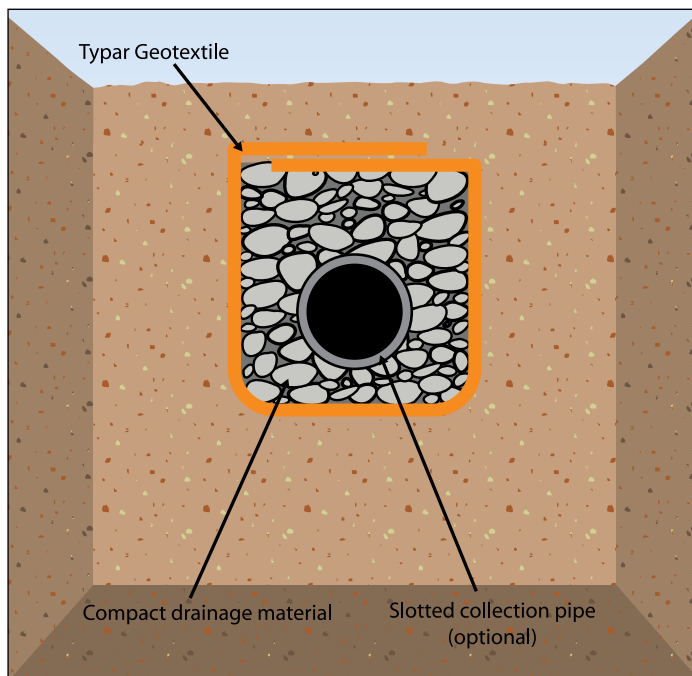


Figure 1: As soil particles infiltrate the aggregate trench, they reduce the capacity of the drainage system.

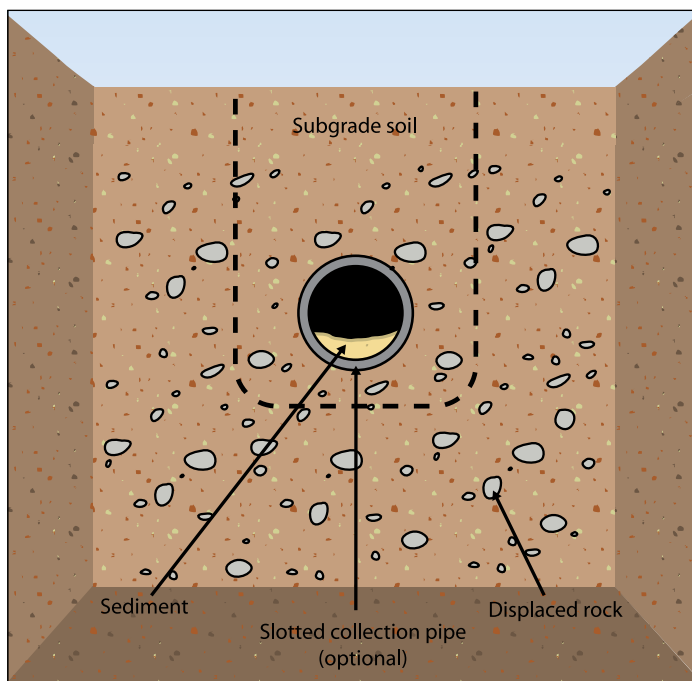


Figure 2: Typar separates soil from the drainage material with the permeable barrier that keeps soil out—preventing clogging of the system.

With the use of Typar geotextiles, septic systems are simple to design and inexpensive to construct. Typar geotextiles allow water to flow through to the drain

field but prevent soil particles from passing, which prevents the system from clogging (Figure 2). As Typar geotextiles are available in a wide variety of opening sizes, the appropriate grade can be selected depending on the soil particle size in the application.

A Typar geotextile is recommended in all septic system drain fields to provide a separator to prevent the intermixing of the drainage aggregate materials with the subgrade soil and therefore protect the drain field from clogging.

2.0 HOW TYPAR GEOTEXTILES WORK

The failure of a septic system is caused by the intermixing of the free-draining aggregate materials with the subgrade soil, which leads to clogging of the aggregate. Typar geotextiles separate the soil from the aggregate stone, which prevents intermixing, maintains the integrity of the drain field and preserves the original design and design life of the system. Typar's tensile strength, puncture resistance, tear resistance, opening size and hydraulic properties make it an ideal filter fabric for septic systems.

The primary design requirement of a septic system is the development of a natural graded filter layer (Figure 3). Typar promotes the development of such layers because its unique, bonded fibers create a pathway that resembles a well-graded aggregate filter. Typar provides an effective drainage structure since it has both high permeability and the ability to retain soil particles adjacent to the Typar; this effectively prevents piping of the subgrade soils and blocks fine particles from entering and clogging the drain field.

3.0 DESIGN CONSIDERATIONS AND SELECTION OF GEOTEXTILES

The primary function of the geotextile in subsurface drainage applications is filtration. The design of subsurface drains using geotextile separators requires the evaluation of two criteria:

- Retention criteria that ensures the geotextile openings are small enough to prevent migration of soil particles (piping).
- Permeability criteria that ensures the geotextile is permeable enough to allow liquids to pass freely through. "Permeability" of a geotextile is measured by way of its permittivity (or cross-plane flow rate).

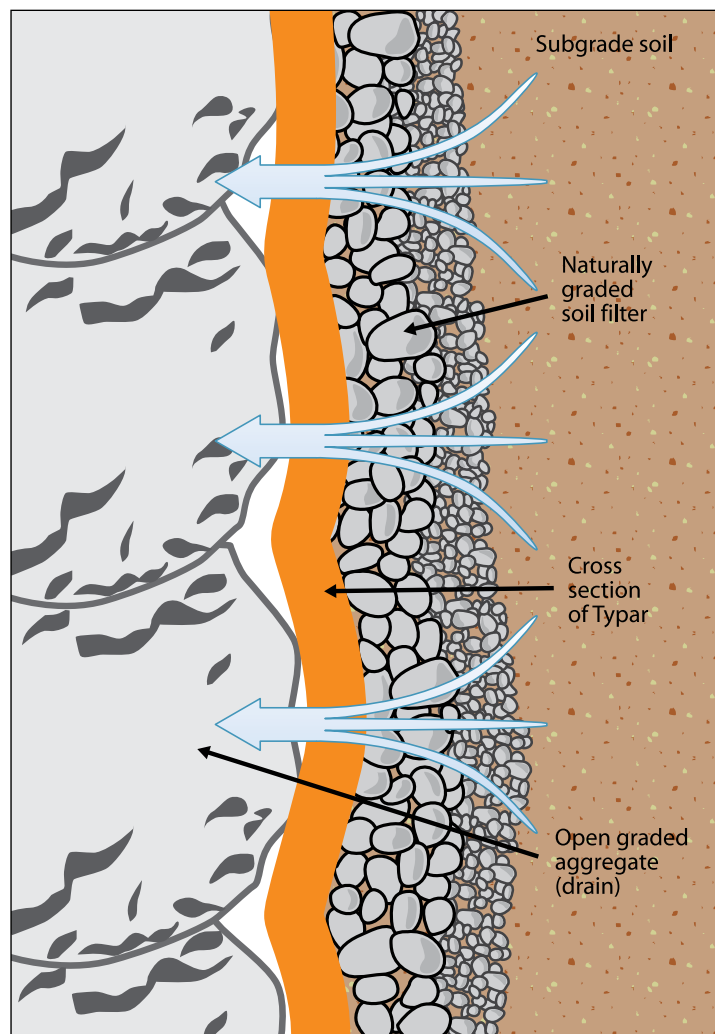


Figure 3: Graded soil filter formed next to the Typar.

| SOIL NAME | DIAMETER | | US STANDARD SIEVE SIZE | FAMILIAR EXAMPLE |
|-------------------|-------------|--------------|---|------------------------|
| | mm | inches | | |
| Boulders | Over 300 | Over 12 | > 12" | Larger than basketball |
| Cobbles (rounded) | 76-300 | 3-12 | 3-12" | Grapefruit |
| Coarse gravel | 19-76 | 0.75-3.0 | 0.75-3" | Orange or lemon |
| Fine gravel | 4.75-19 | 0.19-0.75 | No. 4-0.75 | Grape or pea |
| Coarse sand | 2.0-4.75 | 0.08-0.19 | No. 10-No. 4 | Rock salt |
| Medium sand | 0.42-2.0 | 0.016-0.08 | No. 40-No. 10 | Sugar or table salt |
| Fine sand | 0.074-0.42 | 0.003-0.016 | No. 200-No. 40 | Powdered sugar |
| Silt sizes | 0.002-0.074 | 0.0008-0.003 | Rock flour and finer; particles cannot be distinguished with naked eye at distances of 20cm (8"). | |
| Clay sizes | < 0.002 | < 0.00008 | | |

Figure 4: Soil description based on typical grain size.

| MAJOR DIVISIONS | SUBDIVISIONS | TYPICAL NAMES | LABORATORY CLASSIFICATION CRITERIA |
|--|--|--|--|
| Coarse-grained soil (More than 50% retained on No. 200 sieve) | Gravel (More than 50% of coarse fraction retained on No. 4 sieve) | Well-graded gravel or gravel-sand mixture, little or no fines Poorly-graded gravel or gravelly sand, little or no fines Silty gravel, gravel-sand-salt mixtures Clay-like gravel, gravel-sand-clay mixtures | Less than 5% fines* Less than 5% fines* More than 12% fines* More than 12% fines* |
| | Sand (50% or more of coarse fraction passes through No. 1 sieve) | Well-graded gravel or gravelly sand, little or no fines Poorly-graded sand or gravelly sand, little or no fines Silty sand, sand-silt mixtures Clay-like sand, sand-clay mixtures | Less than 5% fines* Less than 5% fines* More than 12% fines* More than 12% fines* |
| Fine-grained soil (50% or more passes No. 200 sieve) | Silt and clay (Liquid limit less than 50) | Inorganic silt, rock flour, silt of low plasticity Inorganic clay or low plasticity, gravelly clay, sandy clay Organic silt and organic clay or low plasticity | Inorganic soil Inorganic soil Organic soil |
| | Silt and clay (Liquid limit 50 or more) | Inorganic silt, micaceous silt, silt of high plasticity Inorganic, highly plastic clay, fat clay, silty clay Organic silt and organic clay or high plasticity | Inorganic soil Inorganic soil Organic soil |
| Peat | Highly organic | Peat and other highly organic soil | Primarily organic matter, dark in color and organic color |

Figure 5: Unified soil classification system sieve.

Courtesy of McGraw Hill and Robert W. Day, Soil Testing Manual, pg. 81.

*Fines are those soil particles that pass the No. 200

3.1 RETENTION CRITERIA

Soil identification based on grain size is a useful indicator of the soil behavior when filtered by a geotextile. The selection of a geotextile is normally based on the percent of the subgrade soil passing through a 0.075 mm sieve (No. 200 sieve). Figure 4 describes the different types of soil based on typical grain size.

3.2 PERMEABILITY STANDARD

The default geotextile selection is based on the simple premise that permeability of the geotextile is greater than permeability of the soil based on the predominant particle size of the soil. All grades of Typar geotextiles are more permeable than clean well-graded sand and gravel (Figure 6 and Figure 7).

3.3 SELECT THE GEOTEXTILE

AASHTO M288 is the applicable specification for the use of geotextiles for septic systems, allowing for the long-term passage of water out of a septic system

| SOIL TYPE | PERMEABILITY COEFFICIENT K (CM/SEC) |
|------------------------------------|-------------------------------------|
| Uniform coarse sand | 0.4 |
| Uniform medium sand | 0.1 |
| Clean, well-graded sand and gravel | 0.01 |
| Uniform fine sand | 0.004 |
| Well-graded silty sand and gravel | 0.0004 |
| Silty sand | 0.0001 |
| Uniform silt | 0.00005 |
| Sandy clay | 0.000005 |
| Silty clay | 0.000001 |
| Clay | 0.0000001 |
| Colloidal clay | 0.000000001 |

Figure 6: Typical permeability of soil types.

while retaining the soil. Selection of the appropriate geotextile or Typar style is dependent on the subgrade soil.

Use Figure 8 as a guide to select the appropriate Typar geotextile. The engineer should always refer to the full

| | PERMITTIVITY (D4491) sec ⁻¹ | PERMEABILITY (D4491) cm/sec | WATER FLOW (D4491) gal/min ft ² | APPARENT OPENING SIZE (MAX) (D4751) | |
|------------|--|-----------------------------|--|-------------------------------------|----------|
| | | | | mm | US Sieve |
| TYPAR 3801 | 0.1 | 0.01 | 8 | 0.09 | 170 |
| TYPAR 3631 | 0.2 | 0.01 | 20 | 0.10 | 140 |
| TYPAR 3601 | 0.1 | 0.01 | 15 | 0.10 | 140 |
| TYPAR 3501 | 0.5 | 0.03 | 50 | 0.20 | 70 |
| TYPAR 3401 | 0.7 | 0.03 | 60 | 0.21 | 70 |
| TYPAR 3341 | 0.7 | 0.03 | 85 | 0.25 | 60 |
| TYPAR 3301 | 0.8 | 0.03 | 95 | 0.30 | 50 |
| TYPAR 3201 | 1.0 | 0.03 | 190 | 0.59 | 30 |
| TYPAR 3151 | 1.5 | 0.04 | 235 | 0.84 | 20 |

Note: The ability of a geotextile to pass water is indicated by the permittivity—therefore it should be used to compare the ability of various types (needlepunched, SRW, and heatbonded), NOT PERMEABILITY. For comparisons, permittivity of fabrics should be measured UNDER LOAD. See ASTM D-4491. To get permeability, you multiply permittivity by the fabric thickness. Therefore, if the fabrics pass the same amount of water and one is twice as thick, it will appear to pass water twice as fast which could be misleading.

Figure 7: Hydraulic properties of Typar Geotextiles (Minimum average roll values except AOS).



| IN SITU SOIL PASSING .075 mm (No. 200 sieve) | MINIMUM PERMITTIVITY sec ⁻¹ | MAXIMUM AOS mm | TYPAR GEOTEXTILE SELECTION AASHTO M288 CLASS | | | | | | |
|--|--|-------------------|---|------|------|------|------|------|------|
| | | | - | - | 3 | 2 | 1 | 1 | 1 |
| <15% | 0.5 | 0.43 | 3301 | 3341 | 3401 | 3501 | | | |
| 15% - 50% | 0.2 | 0.25 | | 3341 | 3401 | 3501 | | 3631 | |
| >50% | 0.1 | 0.22 | | | 3401 | 3501 | 3601 | 3631 | 3801 |

Figure 8: Selection of TYPAR Geotextiles (Adopted from AASHTO M288).

AASHTO M288 specification for final selection of the geotextile.

Septic systems can normally use lighter, less robust fabrics with larger openings than the usual drain systems since the predominant flow of liquid is from the inside of the trench out through the fabric into the surrounding soil. Since there are normally very light loads over septic systems lighter weight fabrics are generally sufficient.

4.0 INSTALLATION GUIDE

Successful use of geotextiles in septic system design requires proper installation. Follow the sequence of installation in Figure 9.

5.0 OVERLAP AND JOINING

Overlaps provide continuity between adjacent geotextile rolls. Sufficient overlap is required to prevent fabric separation during backfilling. A minimum overlap of 12 inches is recommended.

Pins or piles of stone may be used to maintain geotextile overlaps during installation. Geotextile overlaps at the end of rolls should be in the direction of the aggregate placement with the previous roll on top.

6.0 SETTING SPECIFICATIONS

Specifications should generally follow the design considerations in sections 3.0 to 3.3. Primary considerations include the minimum geotextile requirements for design retention, filtration and survivability.

For septic systems, the engineer should specify an AASHTO M288 Class of geotextile as follows:

AASHTO M288 Class 1 or TYPAR 3631,
AASHTO M288 Class 2 or TYPAR 3501, or
AASHTO M288 Class 3 or TYPAR 3401.

Additional requirements should reference the AASHTO M288; i.e. "for certification, sampling, testing and acceptance, shipment and storage requirements of AASHTO M288."

When specifying Typar geotextiles for septic system drains, specify the appropriate Typar grade with the confidence that all Typar geotextiles are manufactured to the high quality standards required by the septic system industry.

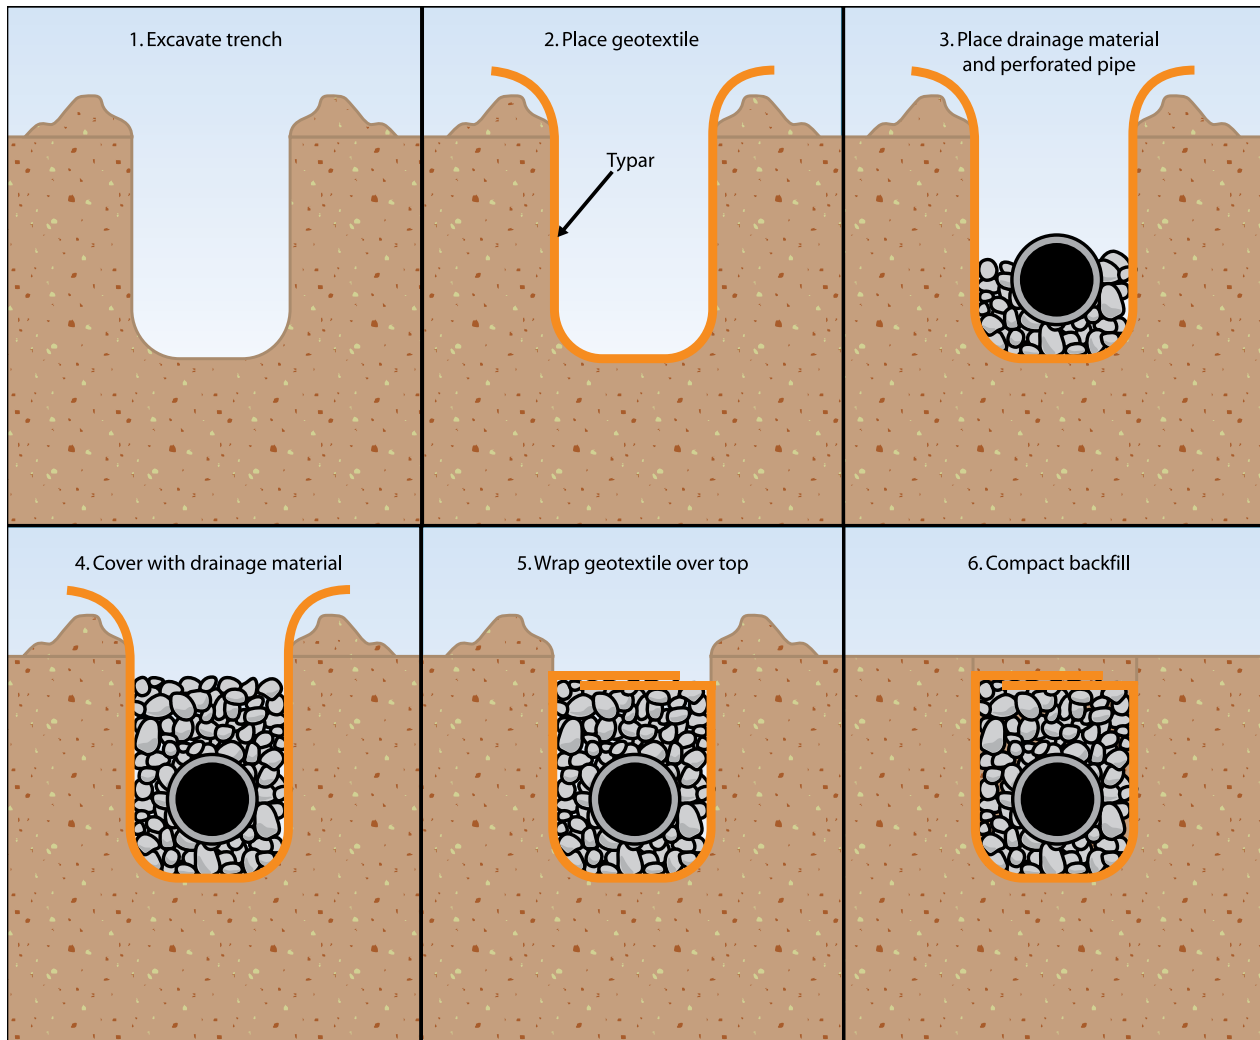


Figure 9: Installation guide for underdrain construction.

