PRODUCT SELECTOR

and heavily pedestrianized grass paths on firm, well-drained ground.

Permanent, grassed overflow grassed


taxiways, RV and trailer park areas and


car lots, access lanes, light aircraft

Heavy Grade*


equestrian surfaces.

TYPAR manufactures a large range of products to reinforce, stabilize and protect grass and gravel surfaces. The chart below gives an overview of which product may be best suited for your project as determined by the existing ground conditions, the application and the frequency of use.

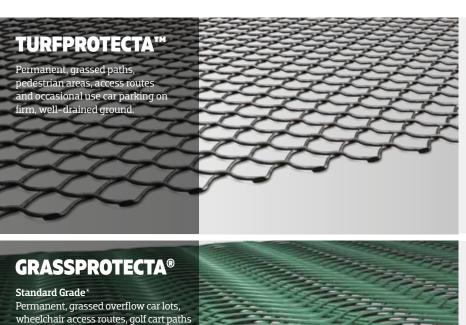

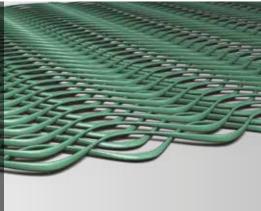



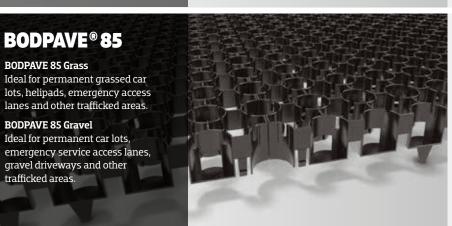



APPLICATION

Pedestrian and occasional

light vehicle usage

Light vehicle and heavy pedestrian usage

Light vehicle and heavy

pedestrian usage

Standard vehicle loads

up to H15 and heavy

pedestrian usage.





APPLICATION



Heavy vehicle loads up to H25 loading



Heavy vehicle loads up to H25 loading

TYPAR GEOCELL

Slope protection and load support. Suitable for slopes up to 45 degrees (1:1 slope) and on horizontal surfaces to provide a stable base for traffic and an even load distribution.






Heavy vehicle loads up to H25 loading, off-road industrial machinery

BIOBARRIER®

An innovative chemical and physical barrier system combining the Non systemic stopping power of Trifluralin with the strength and durability of TYPAR



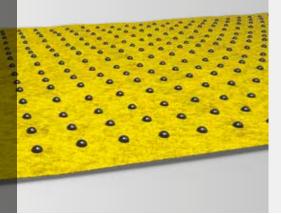



Tree or vegetation root areas

GEOTEXTILE

TYPAR non-woven, thermally bonded GEOTEXTILES utilize continuous filament technology for superior strength and uniformity, providing the ideal solution for construction and civil engineering applications.





light vehicle usage



Light vehicle and heavy pedestrian usage

^{*} The suitability of a standard or heavy grade will be site specific. Please contact TYPAR to discuss with one of our technical managers. All TYPAR grass and ground reinforcement products are suitable for use as a source control solutions in LID and NPDES applications.